



554108

(43) International Publication Date  
18 November 2004 (18.11.2004)

PCT

(10) International Publication Number  
**WO 2004/098870 A1**

(51) International Patent Classification<sup>7</sup>: B32B 3/24, 5/28

[GB/GB]; 5 Cornavill Close, Abingdon, Oxon OX14 2ND (GB).

(21) International Application Number:

PCT/GB2004/001962

(74) Agent: FRENCH, Clive; Siemens AG, P.O. Box 221634, 80506 Munich (DE).

(22) International Filing Date: 6 May 2004 (06.05.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

0310450.2

7 May 2003 (07.05.2003) GB

(71) Applicants (for all designated States except US): OXFORD MAGNET TECHNOLOGY LTD. [GB/GB]; Wharf Road, Eynsham, Witney OX29 4BP (GB). CROMPTON TECHNOLOGY GROUP LIMITED [GB/GB]; Thorpe Park, Thorpe Way, Banbury, Oxon OX16 4SU (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and

(75) Inventors/Applicants (for US only): ATKINS, Andrew, Farquhar [GB/GB]; 5 Bennett Close, Chacombe, Nr Banbury, Oxon OX17 2SZ (GB). DAVIDSON, Roger

[Continued on next page]

(54) Title: A STRUCTURAL COMPOSITE MATERIAL FOR ACOUSTIC DAMPING

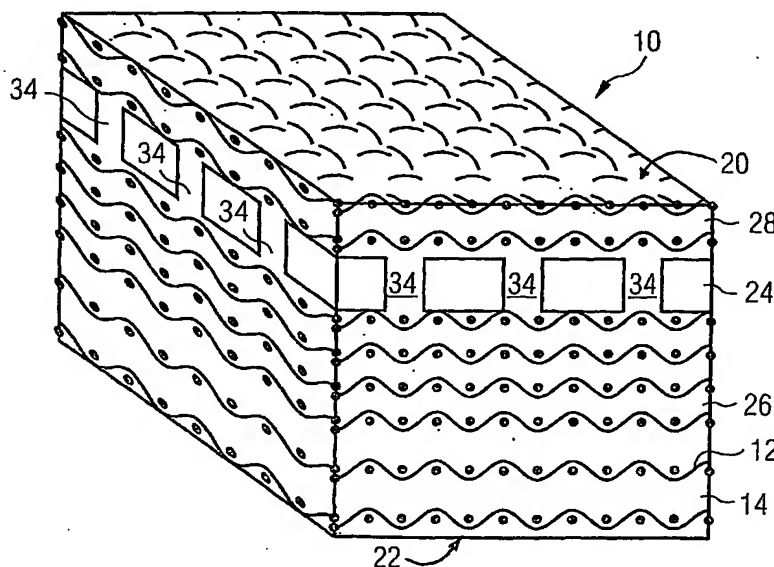

(57) Abstract: A composite material for acoustic or mechanical damping, comprising a plurality of layers of fibrous material embedded in a solid material. The solid material layers are interspersed by perforated films of viscoelastic polymer.

WO 2004/098870 A1



**Published:**

— *with international search report*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*